

ELECTRIC POKERS



Go Electric. It's Smart.

Light and maneuverable, easy to use and of course equipped with the power needed for the toughest jobs. Just plug it in and get to work.

- › Gets the job done faster with fewer dips
- › High power, stable speed and high centrifugal force
- › Built-in frequency converter
- › Reduced hand/arm vibration
- › Low life cycle cost



CALL 800.532.7402 TO ORDER TODAY!

apt-tools.com



**PROVEN POWER.
RUGGED RELIABILITY.**

Thanks to the built-in frequency converter all you need to start working is a regular wall socket with the appropriate voltage. The electric motor-in-head design provides the poker head with outstanding performance, high power and stable speed. Rapid acceleration helps minimize air voids within the concrete and transport them to the surface. Overall costs are kept to a minimum thanks to quality components and the service-friendly design.

LED Indicator

The new LED indicator shows the electronic box working status to the operator.

Customize

Special poker hose length available on request.

Easy Handling

32.8 feet of cable + 16.4 feet of hose give exceptional reach around the worksite. The overall design is also very service friendly.

Work Faster

High centrifugal force, stable speed and high amplitude contribute to good concrete vibration with fewer dips.

Built-in Electronics


All electronics are built-in into the new, 30% lighter streamlined aluminum box with one push ON/OFF button.

Think Safety

The built-in converter is well protected against shock, overload and overheating.

Plug and Poke

Any regular single-phase wall socket with the appropriate voltage will suffice as power source. Just plug in and start work straight away.

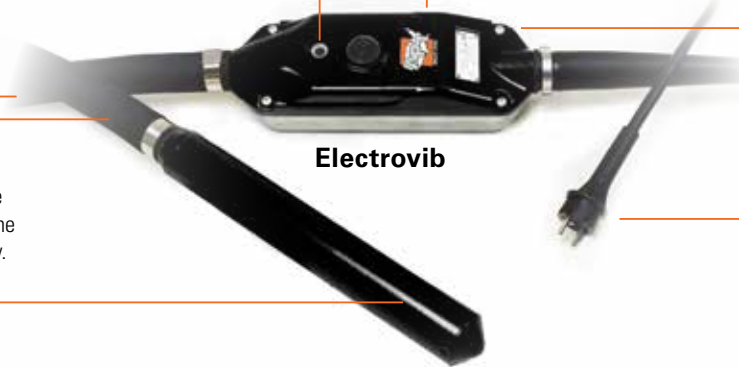

Features and benefits

- › One push ON/OFF button
- › LED-indicator for work status
- › Thermo-switch in poker head
- › Oil lubricated with ball and needle bearings
- › Fits a wide range of applications
- › No periodic maintenance
- › Service friendly design

Electrovib		40	48	56
Tube diameter	in	1-5/8	1-7/8	2-1/4
Tube length	in	13	14	15
Tube weight	lb	5	9.26	11.5
Total weight	lb	28.88	32.4	35.05
Hose length	ft	16-7/16		
Cable length	ft	48-3/4		
Frequency	vpm	12,000		
Centrifugal force	N	1,600	2,700	4,600
Primary voltage	V ±10%	115V-1-50/60 Hz		
Ampere	A	5	9	13.8
Power	hp	0.54	1.25	1.57
Converter dimensions L x W x H	in	11.82 x 3.94 x 3.15		
Vibration value	m/s ²	3.7	4.33	5.87
Noise level	dB(A)	78	76	79
Part number		4812052114	4812052117	4812052120

AMERICAN PNEUMATIC TOOLS

A business unit with Construction Equipment North America LLC
 1000 S. Grand Ave.
 Santa Ana, CA 92705
 Tel 714.285.2828 | Fax 714.285.2829
 Toll-free Tel 800.532.7402 | Fax 800.715.6502



**PROVEN POWER.
RUGGED RELIABILITY.**